


# JQS Panel Cutter

The JQS Panel Cutting Device for panel cut of quilting material is available in different formats and can be adapted individually on your demands.

- Cutting width: as required
  - Cutting length: as required
  - Double light barrier: creep speed / stop
  - Presser rail: pneumatic
  - Drapery roller: pneumatic
  
  - Complete safeguard
  - Interface for JQS Eltron SLM
  - Controller with Touchscreen
  - Manual-Automatic mode
  - Single cut / double cut
  - Batch counter with preselection
  - HMI (Human Machine Interface) in German, Spanish, English or French
- The double light barrier with creep speed function guarantees exact and constant length of the panels.
  - Through the pneumatic drapery roller materials of different thickness can be cut without any adjustments and also slipping of the material is impossible.
  - With the double cut mode of operation even extreme thick material combinations can be processed trouble free.

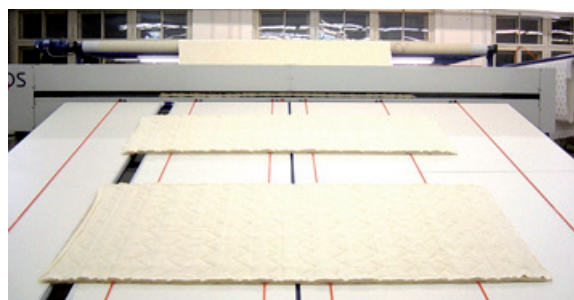

The controller is operated very user friendly by a touch screen. The various features can be activated or deactivated easily through symbols on the touch screen. The Border cutter and the edge cutter are integrated into the controller.